



PRODUCT DATASHEET

TERMINATOR™ /FAK KITS

FOR TUBETRACE® ELECTRICALLY HEATED TUBING

Terminator kits are approved for use in ordinary (non-classified) and hazardous (classified) areas. The Terminator kits have a maximum exposure temperature rating of 250°C (482°F) with a minimum installation temperature of -60°C (-76°F). The molded FAK kits have a maximum temperature rating of 105°C (221°F) with a minimum installation temperature of -40°C (-40°F).

The following Terminator Kits can be used with the molded FAK Kits shown below. These combination kits must be ordered together!

TERMINATOR/FAK COMBINATION KITS



DP/FAK and ZP/FAK Power Connection/Splice Kits are designed to fabricate power connections, in-line/T-splice connections or for making end terminations on TubeTrace with electric heat tracing. (PETK/SCTK termination kit required, order separately)



Surface Mounted Bulkhead Entry Kit is designed to provide an effective transition when TubeTrace must pass through an enclosure or shelter wall.
FAK-1 [fits 32 mm—51 mm (1-1/4"—2") O.D. bundles]



DS/DE/FAK & ZS/ZE/FAK In-Line Splice/End Kits are designed to fabricate outside-the-insulation in-line splices or end terminations
DE-B & ZE-B³ are designed to provide visual indication of an energized heating circuit. (SCTK termination kit required, order separately).



90° Large Elbow Transition Kit is designed to make a waterproof seal over TubeTrace elbow splices.
FAK-2 [fits 32 mm—51 mm (1-1/4"—2") O.D. bundles]
FAK-2L [fits 57 mm—89 mm (2-1/4"—3-1/2") O.D. bundles]



DL/FAK and ZL/FAK Indicating Light Kits are designed to provide visual indication of an energized heating circuit. The kit may be utilized as a power connection or an end termination kit. (PETK/SCTK termination kit required, order separately).



In-Line Splice Kit is designed to make a weather proof seal over TubeTrace in-line splices.
FAK-4 [fits 32 mm—51 mm (1-1/4"—2") O.D. bundles]
FAK-4L [fits 57 mm—89 mm (2-1/4"—3-1/2") O.D. bundles]




Order Separately
PETK circuit fabrication kit includes a power boot, end cap, RTV adhesive.
SCTK splice connection/termination kit includes a power boot, wire nuts, RTV adhesive.



Tee Splice Kit is designed to make a waterproof seal over TubeTrace Tee splices.
FAK-5 [fits 32 mm—51 mm (1-1/4"—2") O.D. bundles]
FAK-5L [fits 57 mm—89 mm (2-1/4"—3-1/2") O.D. bundles]

PRODUCT REFERENCE LEGEND

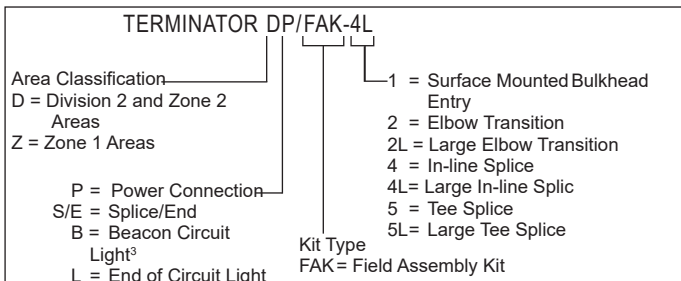

Notes

- Stand alone FAK Kits are also available for mounting thermostats and temperature sensors or for unheated ThermoTube® and SafeTrace® bundles.
- Terminator and FAK combination kits must be ordered together.
- DE-B and ZE-B beacon lights available with FAK-1 kits only.
- All tube fittings to be provided by others.

Terminator DP/FAK-4 (shown)





PRODUCT DATASHEET
TERMINATOR™ / FAK KITS
FOR TUBETRACE® ELECTRICALLY HEATED TUBING

SPLICE KITS FOR ELECTRICAL HEAT TRACING



PBSK and TBSK is an under-insulation splice kit for use in ordinary and hazardous (classified) areas. This kit may be used with all SX self-regulating heating cables.



HPSK is an under-insulation splice kit for use in ordinary and hazardous (classified) areas. This kit may be used with all HPT power-limiting heating cables.